


NZ086 系列

NZ086系列转子法兰防水导电滑环是外径86mm的转子部分带连接法兰的一系列防水滑环的总称，实心滑环，适用于法兰端面安装。

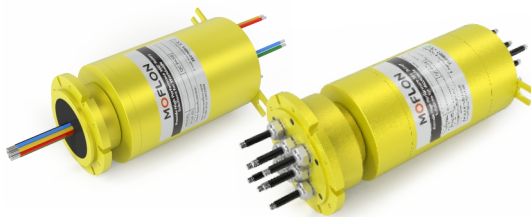

订购型号说明

NZ 086-P 0610-S 06-IP66

NZ: 转子法兰防水导电滑环系列代号

086: 外径86mm

P: 功率环道

0610: 6路, 每路0~10A


IP66: 防水等级

06: 信号路数(每路0~5A)


S: 信号环道

外形尺寸图

NZ086-IP66

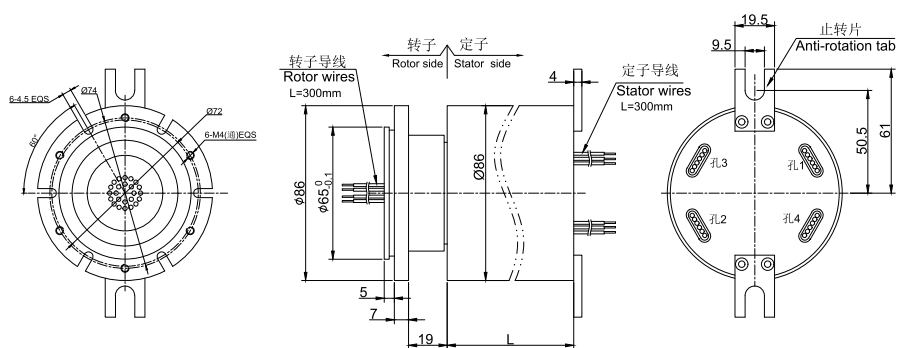

NZ086-IP68

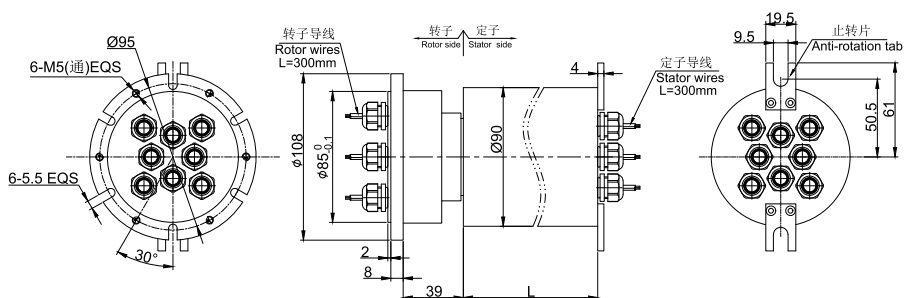

选型表

NZ086系列防水滑环选型表							
型号	10A	信号或5A	长度L (mm)	型号	10A	信号或5A	长度L (mm)
NZ086-S06-IP66	0	6	62.2	NZ086-S06-IP68	0	6	87.2
NZ086-P0610-IP66	6	0	62.2	NZ086-P0610-IP68	6	0	87.2
NZ086-S12-IP66	0	12	82.6	NZ086-S12-IP68	0	12	107.6
NZ086-P0610-S06-IP66	6	6	82.6	NZ086-P0610-S06-IP68	6	6	107.6
NZ086-P1210-IP66	12	0	82.6	NZ086-P1210-IP68	12	0	107.6
NZ086-S18-IP66	0	18	103	NZ086-S18-IP68	0	18	128
NZ086-P0610-S12-IP66	6	12	103	NZ086-P0610-S12-IP68	6	12	128
NZ086-P01210-S06-IP66	12	6	103	NZ086-P01210-S06-IP68	12	6	128
NZ086-P1810-IP66	18	0	103	NZ086-P1810-IP68	18	0	128
NZ086-S24-IP66	0	24	123.4	NZ086-S24-IP68	0	24	148.4
NZ086-P0610-S18-IP66	6	18	123.4	NZ086-P0610-S18-IP68	6	18	148.4
NZ086-P1210-S12-IP66	12	12	123.4	NZ086-P1210-S12-IP68	12	12	148.4
NZ086-P1810-S06-IP66	18	6	123.4	NZ086-P1810-S06-IP68	18	6	148.4
NZ086-P2410-IP66	24	0	123.4	NZ086-P2410-IP68	24	0	148.4
NZ086-S30-IP66	0	30	143.8	NZ086-S30-IP68	0	30	168.8
NZ086-P0610-S24-IP66	6	24	143.8	NZ086-P0610-S24-IP68	6	24	168.8
NZ086-P1210-S18-IP66	12	18	143.8	NZ086-P1210-S18-IP68	12	18	168.8
NZ086-P1810-S12-IP66	18	12	143.8	NZ086-P1810-S12-IP68	18	12	168.8
NZ086-P2410-S06-IP66	24	6	143.8	NZ086-P2410-S06-IP68	24	6	168.8
NZ086-P3010-IP66	30	0	143.8	NZ086-P3010-IP68	30	0	168.8
NZ086-S36-IP66	0	36	167.2	NZ086-S36-IP68	0	36	192.2
NZ086-P0610-S30-IP66	6	30	167.2	NZ086-P0610-S30-IP68	6	30	192.2
NZ086-P1210-S24-IP66	12	24	167.2	NZ086-P1210-S24-IP68	12	24	192.2
NZ086-P1810-S18-IP66	18	18	167.2	NZ086-P1810-S18-IP68	18	18	192.2
NZ086-P2410-S12-IP66	24	12	167.2	NZ086-P2410-S12-IP68	24	12	192.2
NZ086-P3010-S06-IP66	30	6	167.2	NZ086-P3010-S06-IP68	30	6	192.2
NZ086-P3610-IP66	36	0	167.2	NZ086-P3610-IP68	36	0	192.2
NZ086-S42-IP66	0	42	187.6	NZ086-S42-IP68	0	42	212.6
NZ086-P0610-S36-IP66	6	36	187.6	NZ086-P0610-S36-IP68	6	36	212.6
NZ086-P1210-S30-IP66	12	30	187.6	NZ086-P1210-S30-IP68	12	30	212.6
NZ086-P1810-S24-IP66	18	24	187.6	NZ086-P1810-S24-IP68	18	24	212.6
NZ086-P2410-S18-IP66	24	18	187.6	NZ086-P2410-S18-IP68	24	18	212.6
NZ086-P3010-S12-IP66	30	12	187.6	NZ086-P3010-S12-IP68	30	12	212.6
NZ086-P3610-S06-IP66	36	6	187.6	NZ086-P3610-S06-IP68	36	6	212.6
NZ086-P4210-IP66	42	0	187.6	NZ086-P4210-IP68	42	0	212.6
NZ086-S48-IP66	0	48	210.2	NZ086-S48-IP68	0	48	235.2
NZ086-P0610-S42-IP66	6	42	210.2	NZ086-P0610-S42-IP68	6	42	235.2
NZ086-P1210-S36-IP66	12	36	210.2	NZ086-P1210-S36-IP68	12	36	235.2
NZ086-P1810-S30-IP66	18	30	210.2	NZ086-P1810-S30-IP68	18	30	235.2
NZ086-P2410-S24-IP66	24	24	210.2	NZ086-P2410-S24-IP68	24	24	235.2
NZ086-P3010-S18-IP66	30	18	210.2	NZ086-P3010-S18-IP68	30	18	235.2
NZ086-P3610-S12-IP66	36	12	210.2	NZ086-P3610-S12-IP68	36	12	235.2
NZ086-P4210-S06-IP66	42	6	210.2	NZ086-P4210-S06-IP68	42	6	235.2
NZ086-P4810-IP66	48	0	210.2	NZ086-P4810-IP68	48	0	235.2
NZ086-S60-IP66	0	60	251	NZ086-S60-IP68	0	60	276
NZ086-P6010-IP66	60	0	251	NZ086-P6010-IP68	60	0	276

注：N个10A电流环并起来可作为1路N*10A电流环使用；比如：2环10A并起来作为1路20A使用。10A和信号（5A）可以任意组合，详细请咨询客服。
可在标准产品上进行非标定制，请咨询客服

技术规格参数

电气技术指标		
参数	数值	
	功率	信号
额定电压	0~400VAC/VDC	0~440VAC/VDC
绝缘电阻	≥1000MΩ/500VDC	≥1000MΩ/500VDC
导线规格	1mm ² 线缆	0.2mm ² 线缆
导线长度	标准长度300mm（可根据要求调整）	
绝缘强度	500VAC@50Hz,60s	
动态电阻变化值	<0.01Ω	

